

BM-1600

Time-Based Brake Monitor



Pressroom  *Electronics* TM

BM-1600 TIME-BASED BRAKE MONITOR

Brake Warning Indicator

Yellow light illuminates when the setpoint is exceeded. Excellent input for the press operator and for maintenance.

Drive Failure

Red LED illuminates when the pulses from the encoder disappear while the brake remains released.

Brake On

Yellow light illuminates when power to the dual solenoid valve drops out.

Ready


Green LED illuminates when all systems are go.

Not Ready

Red LED illuminates when the brake monitor safety relays have dropped out (i.e., drive failure, internal failure, etc.)

+/- Pushbuttons

The +/- pushbuttons are used to set the time values in milliseconds for the brake warning and the brake limit setpoints.

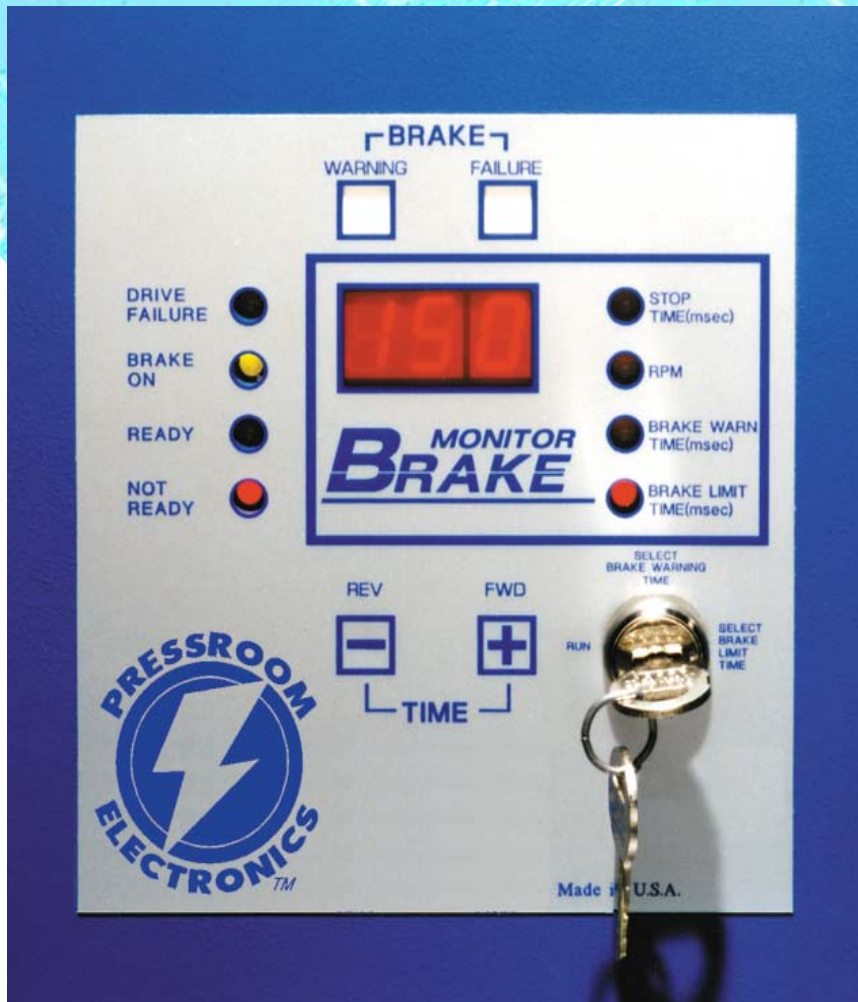

(shown with supervisory controlled keyed selector switch)

Brake Failure Indicator

Red LED illuminates when the actual brake stopping time exceeds the programmed brake limit setpoint.

Stop Time

Displayed in milliseconds after every stop in machine cycle and the red LED is illuminated.

RPM/SPM

Displayed during each press cycle when the red LED is illuminated.

Brake Warning Time

Displayed in milliseconds when the red LED is illuminated.

Brake Limit Time

Setpoint is displayed in milliseconds when the red LED is illuminated.

System Programming Security and Safety

Keyed selector switch controls:

- Brake Warning Time Setpoint
- Brake Limit Time Setpoint
- System Reset
- System Run

HOW THE BM-1600 WORKS

The BM-1600 is a time-based brake monitor that utilizes a high resolution encoder and controller to measure the brake stopping time in milliseconds and also the RPM/SPM of the press. The rotary encoder is attached to the subject machine and is driven on a 1:1 ratio by the power press crankshaft. The brake stopping time of the machine will be displayed on every stop and can be easily read on the bright red light emitting diode (LED) display on the front panel of the unit. The RPM/SPM of the machine will be displayed during the machine cycle.

Individual LED indicators are visible and easily define the existing status of the unit during the press cycle (shown above). All system programming and diagnostics are front panel mounted and controlled which will minimize downtime while enhancing operator safety and press maintenance. All operating mode selections are supervisory

controlled by a keyed selector switch which meets all OSHA and ANSI standards for mode selection supervisory control.

To program the Brake Warning Time and the Brake Limit Time setpoints, the user inserts the programming key into the lock and turns to the desired position (status LED illuminates). By depressing the +/- buttons to the desired time setting and turning the key back to the Run position, the new warning/failure time setpoints are saved. All errors and time value setpoints are permanently stored in the EEPROM memory which does not require a battery backup. The user cannot change or reprogram the Brake Warning or Brake Limit setpoints while the encoder is in motion, which is an additional safety feature.

The dual force-guided captive contact safety output relays of the BM-1600 are always de-

energized when the programming key is not in the Run position. When the key is in the Run position, the safety output relays are always energized as long as there are no internal or external faults detected. When a fault is detected, it is recorded within the system in non-volatile memory along with the last stopping time. If the power to the Brake Monitor System is removed and reapplied, the last error to occur will come back up and prevent any further use until the programming key is used. Only the key turned to the reset position can clear a fault. If no fault occurred but the programming key is moved into the reset position, the output relays will de-energize as a safety feature. Motion detection will still be monitored while in the Reset position even if the encoder is turning.

OSHA/ANSI Compliance

The BM-1600 system complies with OSHA code 1910.217 and ANSI Code B11.1-2001 for brake monitoring and control reliability standards. The unit will automatically prevent the activation of a successive stroke if the stopping time deteriorates beyond the brake limit setpoint. Required on any press that has a single stroke mode and uses either a two-hand control, light curtain or type B gate system.

Non-volatile EEPROM Memory

All diagnostic faults and brake setpoints are permanently saved in non-volatile memory which does not require battery backup. Information is retained indefinitely after a power loss or machine shutdown.

Advanced Design

The advanced circuitry and user friendly

design on the BM-1600 allows both programming and status monitoring to be performed from the front of the compact panel. There is no need to enter the control panel to adjust switches or thumbwheels which will enhance both safety and productivity.

System Self Diagnostics

Control displays status and system fault codes are on the LED display. A detailed definition, cause, and cure listing is supplied within each installation and operation manual.

Predictive Maintenance Diagnostic Tool

The unique "brake warning" feature on the BM-1600 allows for predictive maintenance to be scheduled on the machine, which will minimize downtime. Factors which will be monitored and affect stopping time: machine cycle speed, counter-balance air

supply, tooling weight, clutch air supply, exhaust restrictions, brake wear adjustment, and clutch wear adjustment.

90° and 270° Stop Built-in

The built-in 90° press stop feature initiates a stop signal at the 90° and the 270° position in the downstroke. This is required information when calculating the location of point of operation guarding systems or palm button assemblies.

Complete Package Supplied

Everything you need to install and operate the BM-1600 is supplied.

- BM-1600 Brake Monitor Controller
- Model E-160 Encoder
- 20' (6m) of encoder cable
- Dimensional and technical data
- Installation and operation manual

Standard Features and Capabilities

- Control reliable design
- Dual captive contact safety relays
- Bright red LED display
- Non-volatile EEPROM memory
- Flat unobtrusive design
- Drive failure detection
- Motion detector
- Automatic 90° and 270° press stop
- Programming security with keyed selector switch
- Very easy to program and to adjust limits
- System self-diagnostics with display codes
- External diagnostic display
- System status indicators (LED's)
- Solid state indicators - No incandescent bulbs to burn out
- Designed specifically for the rigorous metal stamping/ metal forming industry
- Interfaces easily with all types of press controls; solid state or relay logic
- Installs with ease on OEM, retrofit, or rebuild projects
- Front panel mount for installation into an existing control panel
- Made in USA

Specifications

Controller

Power Requirements - 120 +/- 10% VAC, 50-60 Hz

Power Consumption - 8 watts (Relays on)

Temperature Range - 0° to 50° Celsius

Relay Configuration - Dual self-checking force-guided captive contact safety relays

Relay Contact Rating

8 amps @ 250VAC resistive for safety relays

4 amps @ 250VAC resistive for alarm relay

System Accuracy - +/- 1 millisecond

Setpoints - Drive Failure (1 to 25 tenths of a second)

Brake Warning (1 to 999 milliseconds)

Brake Failure (1 to 999 milliseconds)

Enclosure - NEMA 12 Steel

Indicators:

Brake Fault - Red LED

Drive Failure - Red LED

Ready - Green LED

Stop Time Display - Red LED

Brake Warning Setpoint - Red LED

LED

Brake Warning - Yellow LED

Brake ON - Yellow LED

Not Ready - Red LED

RPM - Red LED

Brake Limit Setpoint - Red

Dimensions - 8" (203mm) Height x 7" (178mm) Width x 4" (102mm) Depth

Encoder (Part # E-160 — CW or CCW Rotation Capable)

Cable - 20' (6m) supplied standard; 100' (2540mm) max.

Gauge: 20 AWG - 3 connectors plus drain

Rating: 300 VAC @ 60 C

Shaft Loading - Radial: 35 lbs; Axial: 40 lbs.

Temperature Range - 0° to 50° Celsius

Dimensions - 5.5" (140mm) Height x 3.75" (95mm) Width x 3-9/16 (90mm)